



Republika ng Pilipinas Lungsod Quezon

BIDS AND AWARDS COMMITTEE FOR INFRASTRUCTURE & CONSULTANCY

2nd Floor, Finance Building, Procurement Department, Quezon City Hall Complex, Elliptical Road, Quezon City



March 9, 2022

Request for Quotation/ Proposal

No.	Project No.	Project Name	Location	Amount	Duration Cal. Days	Office	Source Fund
<u>Buildings – Small B</u>							
1	22-001SV	Proposed Rehabilitation of Fire Exit at Social Development Center at Barangay Payatas	Payatas	165,523.84	30	Engineering Department	Engineering Department
2	22-002SV	Proposed Rehabilitation of Reception Area at Betty Go Belmonte Super Health Center in Barangay Holy Spirit	Holy Spirit	341,124.74	30	Engineering Department	20% Community Development Fund
3	22-003SV	Proposed Rehabilitation of Novaliches District Hospital Covid Ward	San Bartolome	354,897.38	30	Engineering Department	Engineering Department - SB No. 1
4	22-004SV	Proposed Rehabilitation of Waterline System at Culiati High School	Culiati	586,890.41	60	Engineering Department	Special Education Fund
5	22-005SV	Proposed Temporary Enclosure for Crematory Machine at Baesa Crematorium	Baesa	594,910.45	30	Engineering Department	Engineering Department - SB No. 1
6	22-006SV	Proposed Rehabilitation of Reception Area at Health Centers in Barangay Libis and Barangay Bagumbuhay (District 3)	Libis and Bagumbuhay	632,587.24	30	Engineering Department	20% Community Development Fund
7	22-007SV	Proposed Rehabilitation of Reception Area at Health Centers in Barangay Alicia and Barangay Paltok (District 1)	Alicia and Paltok	809,220.13	30	Engineering Department	20% Community Development Fund
8	22-008SV	Proposed Rehabilitation of Day Care Center at Idang Street, Sitio Aguardiente	Sta. Monica	828,057.99	30	Engineering Department	Engineering Department - SB No. 1
9	22-009SV	Proposed Upgrading of Electrical System at Sauyo High School	Tandang Sora	846,268.11	90	Engineering Department	Special Education Fund
10	22-010SV	Proposed Rehabilitation of Reception Area at Health Centers in Barangay Apolonio Samson, Barangay Tandang Sora and Barangay Pasong Tamo (District 6)	Apolonio Samson, Tandang Sora and Pasong Tamo	851,009.93	30	Engineering Department	20% Community Development Fund



Republika ng Pilipinas

Lungsod Quezon

BIDS AND AWARDS COMMITTEE FOR INFRASTRUCTURE & CONSULTANCY

2nd Floor, Finance Building, Procurement Department, Quezon City Hall Complex, Elliptical Road, Quezon City



11	22-011SV	Proposed Rehabilitation of Electrical System at North Fairview Elementary School	North Fairview	856,353.23	60	Engineering Department	Special Education Fund
12	22-012SV	Proposed Upgrading of Service Entrance at NOH Sta. Lucia Senior High School	Sta. Lucia	908,850.15	60	Engineering Department	Special Education Fund
13	22-013SV	Proposed Construction of Terrace at Barangay Hall In Barangay Kalusugan	Kalusugan	914,528.02	60	Engineering Department	Engineering Department
14	22-014SV	Proposed Rehabilitation of Distribution Feeder at Lagro Elementary School	Greater Lagro	933,602.51	60	Engineering Department	Special Education Fund
15	22-015SV	Proposed Rehabilitation of Reception Area at Health Centers in Barangay Kamuning, Barangay Kaunlaran and Barangay San Vicente (District 4)	Kamuning, Kaunlaran and San Vicente	953,997.37	30	Engineering Department	20% Community Development Fund
<u>Roads – Small B</u>							
16	22-016SV	Proposed Rehabilitation (Surface Improvement) at Lourdes Street	Novaliches Proper	933,825.43	30	Engineering Department	20% Community Development Fund

The Quezon City Government through its Bids and Awards Committee – Infra and Consultancy undertake a Small Value Procurement in accordance with **Section 53.9 of the Revised Implementing Rules and Regulations of Republic Act No. 9184.**

Please quote your best offer for the project/s described above, subject to the Terms and Conditions provided. Submit your proposal/price quotation duly signed by you or your duly authorized representative not later than **15 March 2022** on or before **10:00 A.M.,** Philippine Standard Time, together with the following documents:

1. PhilGEPS Platinum Certificate (3 pages)
2. DTI or SEC Registration Certificate
3. Mayor's Permit
4. Tax Clearance
5. PCAB License (Bidders with valid Philippine Contractors Accreditation Board (PCAB)
6. Audited Financial Statements
7. Net Financial Contracting Capacity (NFCC)
8. List of Key Construction Personnel to be assign for the project
9. List of Major Equipment to be used for the Project
10. Duly Notarized Affidavit of Undertaking of Key Personnel and Equipment
11. Income/Business Tax Returns
12. Omnibus Sworn Statement prescribed by the Government Procurement Policy Board (GPPB) duly notarized with attached Secretary's Certificate (*If a partnership, corporation, cooperative, or joint venture*). The authorized representative as identified in the Omnibus Sworn Statement shall be the signatory in the proposal/price quotation form.



Republika ng Pilipinas Lungsod Quezon

BIDS AND AWARDS COMMITTEE FOR INFRASTRUCTURE & CONSULTANCY
2nd Floor, Finance Building, Procurement Department, Quezon City Hall Complex, Elliptical Road, Quezon City



Opening of Quotations/Proposals will be on **15 March 2022** at exactly **1:00 P.M.**

in a **SEALED LONG BROWN ENVELOPE** shall:

- 1 Contain the Name of Project of the contract to be quoted in capital letters;
- 2 Bear the name and address of the Contractor in capital letters;
- 3 Be addressed to the Procuring Entity's BAC.

Name of Project: **IN CAPITAL LETTERS**

**Quezon City Local Government
BIDS AND AWARDS COMMITTEE (INFRA & CONSULTANCY)
2/F Procurement Department, Finance Building
Quezon City Hall Compound**

TERMS AND CONDITIONS

1. Contractor shall **provide correct and accurate** information required in this form.
2. Price quotation/proposal must be valid for a period of thirty (30) calendar days from the date of submission.
3. Price quotation/proposal, to be denominated in Philippine Peso shall include all taxes, duties and/or levies payable.
4. Quotation/Proposal **exceeding** the Approved Budget for the Contract (ABC) shall be **rejected**.
5. Award of contract shall be made to the lowest quotation/proposal (for infra) which complies with the minimum technical specifications and other terms and conditions stated herein.
6. Any interlineations, erasures or overwriting shall be valid only if they are signed or initialed by the contractor or his/her duly authorized representative/s.
7. The Engineering Department shall have the right to inspect and monitor the construction projects
8. Non-submission of eligibility documents shall mean disqualification of Quotation/Proposal.
9. Liquidated damages equivalent to one tenth (1/10) of one percent (1%) of the cost of the unperformed portion for every day of delay, Engineering Department shall rescind the contract once the cumulative amount of liquidated damages reaches ten percent (10%) of the amount of the contract, without prejudice to other courses of action and remedies open to it.
10. Failure to follow these instructions will disqualify your entire quotation/proposal.

For any clarification you may contact us at 89884242 loc. 8505/8709.

ATTY. MARK DALE DIAMOND P. PERRAL
Chairman, BAC Infra and Consultancy



Republika ng Pilipinas
Lungsod ng Quezon
CITY ENGINEERING DEPARTMENT
5th, 6th 7th Floor, QC Civic Center Building "B"
Telephone Nos. 8988-4242 Local 8538




Project Name : **PROPOSED REHABILITATION OF RECEPTION AREA AT HEALTH CENTERS
IN BARANGAY LIBIS AND BARANGAY BAGUMBAY (DISTRICT 3)** ✓
Location : **BARANGAY LIBIS AND BARANGAY BAGUMBAY, DISTRICT 3, QUEZON CITY** ✓

LIST OF MANPOWER

No.	Manpower	QTY.
1	Project Engineer	1
2	Safety Officer/Practitioner	Refer to DOLE Requirements
3	Foreman	1
4	Skilled Worker	6
5	Driver	1
6	Laborer	8

Prepared by:

JONATHAN RAYNALD T. ESPINO
Planning & Programming Division

Checked by:

JOCELYN A. NAONG
Planning & Programming Division



Republika ng Pilipinas
Lungsod ng Quezon
CIVIL ENGINEERING DEPARTMENT
5th, 6th 7th Floor, QC Civic Center Building "B"
Telephone Nos. 8988-4242 Local 8538



Project Name : **PROPOSED REHABILITATION OF RECEPTION AREA AT HEALTH CENTERS
IN BARANGAY LIBIS AND BARANGAY BAGUMBAY (DISTRICT 3)** ✓
Location : **BARANGAY LIBIS AND BARANGAY BAGUMBAY, DISTRICT 3, QUEZON CITY** ✓


LIST OF EQUIPMENT

No.	NAME OF EQUIPMENT	QTY.
1	Elf truck	1
2	Scaffolding	As Needed
3	Power Tools	As Needed
4	Minor Tools	As Needed

Prepared by:


JONATHAN RAYNALD T. ESPINO
Planning & Programming Division

Checked by:


JOCELYN A. NAONG
Planning & Programming Division

PROJECT TITLE: PROPOSED REHABILITATION OF RECEPTION AREA AT BARANGAY LIBIS AND BARANGAY BAGUMBUHAY (DISTRICT 3)

LOCATION : BARANGAY LIBIS AND BAGUMBUHAY, DISTRICT 3, QUEZON CITY

PROJECT NO. : 22 - 006SV

DURATION : Thirty (30) Calendar Days

BREAKDOWN OF COST

Item of Work (Description)		MATERIALS COST	LABOR COST	INDIRECT COST	AGGREGATE COST
I.	GENERAL REQUIREMENTS				
II.	LIBIS HEALTH CENTER				
III.	PROJECT 4 HEALTH CENTER				

TOTAL COST P _____

LUMP SUM BID IN WORDS : _____

Contractor : _____

BILL OF QUANTITIES
(Building Construction/Rehabilitation Project)

PROJECT TITLE : PROPOSED REHABILITATION OF RECEPTION AREA AT BARANGAY LIBIS AND BARANGAY BAGUMBURHAY (DISTRICT 3)

LOCATION : BARANGAY LIBIS AND BAGUMBURHAY, DISTRICT 3, QUEZON CITY

PROJECT NO. : 22 - 006SV

DURATION : Thirty (30) Calendar Days

SCOPE OF WORK :

- 1 General Requirement include temporary facilities and utilities, billboard, scaffolding, construction safety & health and clearing, hauling and disposal of construction materials and debris.
- 2 Architectural Works include fabrication of accent wall and triage area components.
- 3 All necessary testing of materials and commissioning works shall be performed as per standard procedures.

ITEM NO	WORK DESCRIPTION & SCOPE OF WORKS	QTY	UNIT	UNIT COST	TOTAL COST
I.	GENERAL REQUIREMENTS				
	Billboard	2	unit	P	P
	Construction Safety and Health	1	unit		
	Temporary lighting and water facilities	30	days		
				DIRECT COST I	P
II.	LIBIS HEALTH CENTER				
A	ARCHITECTURAL WORKS				
	Fabricated Materials				
	Accent Wall	5	sq.m.	P	P
	Triage Counter	2	sq.m.		
	Overhead Cabinet	2	sq.m.		
	File Cabinet with Countertop	2	sq.m.		
				Material Cost	P
				Labor Cost	P
				Direct Cost	P
	Logos and Letterings				
	120mm Stainless Steel Lettering	17	set	P	P
	"LIBIS HEALTH CENTER"				
	Acrylic Lettering Room Detail				
	"CONSULTATION/DOCTOR'S ROOM"	1	set		
	"MEDICINE DISPENSING ROOM"	1	set		
	"MILK FEEDING STATION"	1	set		
	"PRE-NATAL ROOM"	1	set		
	"DENTAL ROOM"	1	set		
	"PATIENT'S TOILET"	2	set		
	"RECORDS ROOM"	1	set		
	"NTP ROOM"	1	set		

ITEM NO	WORK DESCRIPTION & SCOPE OF WORKS	QTY	UNIT	UNIT COST	TOTAL COST
	"FAMILY PLANNING ROOM"	1	set		
	"ADOLESCENT ROOM"	1	set		
	"IMMUNIZATION ROOM"	1	set		
	"MEDICINE STORAGE ROOM"	1	set		
	"FIRE EXIT"	1	set		
	"STORAGE"	1	set		
	Stainless Steel Marker				
	MISSION AND VISION	1	set		
	SERVICES OFFERED	1	set		
				Material Cost	P
				Labor Cost	P
				Direct Cost	P
				MATERIAL COST II	P
				LABOR COST II	P
				DIRECT COST II	P

ITEM NO	WORK DESCRIPTION & SCOPE OF WORKS	QTY	UNIT	UNIT COST	TOTAL COST
III.	PROJECT 4 HEALTH CENTER				
	ARCHITECTURAL WORKS				
	Fabricated Materials				
	Accent Wall	5	sq.m.		
	Triage Counter	2	sq.m.		
				Material Cost	P
				Labor Cost	P
				Direct Cost	P
	Logos and Letterings				
	120mm Stainless Steel Lettering	20	set	P	P
	"PROJECT 4 HEALTH CENTER"				
	Acrylic Lettering Room Label				
	"CONSULTATION / DOCTOR'S ROOM"	1	set		
	"MEDICINE DISPENSING ROOM"	1	set		
	"MILK FEEDING ROOM"	1	set		
	"NURSE'S ROOM"	1	set		
	"DENTAL ROOM"	1	set		
	"PATIENT'S TOILET"	1	set		
	"RECORD'S ROOM"	1	set		
	"STORAGE ROOM"	1	set		
	"PRE-NATAL ROOM"	1	set		
	"FAMILY PLANNING ROOM"	1	set		
	"CONFERENCE ROOM"	1	set		
	"NTP ROOM"	1	set		
	"LABORATORY ROOM"	1	set		
	"CASHIER"	1	set		
	"PATHOLOGIST ROOM"	1	set		
	"RECEIVING/EXTRACTION ROOM"	1	set		
	Stainless Steel Marker				
	MISSION AND VISION	1	set		
	SERVICES OFFERED	1	set		
				Material Cost	P
				Labor Cost	P
				Direct Cost	P
				MATERIAL COST III	P
				LABOR COST III	P
				DIRECT COST III	P

ITEM NO	WORK DESCRIPTION & SCOPE OF WORKS	QTY	UNIT	UNIT COST	TOTAL COST
---------	-----------------------------------	-----	------	-----------	------------

SUMMARY

ITEM NO.	WORK DESCRIPTION & SCOPE OF WORKS	TOTAL COST
I.	GENERAL REQUIREMENTS	P
II.	LIBIS HEALTH CENTER	
III.	PROJECT 4 HEALTH CENTER	
<div> <div>TOTAL DIRECT COST</div> <div>Overhead, Contingencies and Miscellaneous Expenses (OCM)</div> <div>Profit</div> <div>VAT</div> <div>TOTAL ESTIMATED COST</div> </div>		<div>P</div> <div>P</div>



Republic of the Philippines
Quezon City
CITY ENGINEERING DEPARTMENT
 Civic Center Building B, Quezon City Hall Compound, Elliptical Road
 Diliman, Central 1100 Quezon City
 Trunkline: +63 2 8988 4242



TECHNICAL SPECIFICATIONS

QUEZON CITY INFRASTRUCTURE PROJECT

PROJECT NAME: PROPOSED REHABILITATION OF RECEPTION AREA AT HEALTH CENTERS IN BARANGAY LIBIS AND BARANGAY BAGUMBUHAY (DISTRICT 3)

LOCATION: BARANGAY LIBIS AND BARANGAY BAGUMBUHAY, DISTRICT 3, QUEZON CITY

I. GENERAL REQUIREMENTS

- a. Comply with the current and existing laws, ordinances and applicable codes, rules and regulations and standards. Any works perform contrary to the existing laws, rules and regulations, ordinances and standards without notice shall bear all cost arising therefrom.
- b. Drawings, specifications, codes and standards are minimum requirements. Where requirements differ, the more stringent apply.
- c. Should there be any change(s) in drawings or specifications, it is required to comply with the governing regulations, notify the implementing agency.
- d. Photographs shall be taken as, when and where directed at intervals of not more than one month. The photographs shall be sufficient in number and location to record the exact progress of the works. The photographs shall be retained and will become the property of the Government.
- e. Site verification / inspection shall be conducted to validate the scope of works. No extra compensation and extension of time shall be given due to negligence or inadvertence.
- f. The quality of materials shall be of the best grade of their respective kinds for the purpose. The work shall also be performed in the best and most capable manner in strict accordance with requirements of the plans and details. All materials not conforming to the requirements of these specifications shall be considered as defective.
- g. All equipment and installations shall meet or exceed minimum requirements of the standards and codes.
- h. Mobilization and Demobilization (if applicable)
 - i. Mobilization shall include all activities and related costs for transportation of personnel, equipment, and operating supplies to the site; establishment of offices, buildings, and other necessary general facilities for the operations at the site.
 - ii. Demobilization shall include all activities and costs for transportation of personnel, equipment, and supplies not anymore required within the construction site including the disassembly, removal and site clean-up of offices and other facilities assembled on the site specifically for this contract.
- i. Execute work in strict accordance with the best practices of the trades in a thorough, substantial, workmanlike manner by competent workmen. Provide a competent, experienced, full-time supervisor who is authorized to make decisions on behalf of the Contractor.
- j. Temporary Facilities and Utilities
 - i. All facilities shall be near the job site, where necessary and shall conform to the best standard for the required types.

21-004 N

- iii. Temporary utilities shall be sufficiently provided until the completion of the project such as water, power and communication.
 - iv. Temporary enclosure shall be provided within the construction site with adequate guard lights, railings and proper signages.
 - v. Upon completion of the work, the temporary facilities shall be demolished, hauled-out and disposed properly.
- k. Adequate construction safety and health protection shall be provided at all times during the execution of work to both workers and property.
- i. A fully trained Medical Aide shall be employed permanently on the site who shall be engaged solely from medical duties.
 - ii. The medical room shall be provided in waterproof; it could be a building or room designated and used exclusively for the purpose and have a floor area of at least 15 square meters and a glazed window area of at least 2 square meters.
 - iii. The location of the medical room and any other arrangements shall be made known to all employees by posting on prominent locations suitable notices in the site.
 - iv. Additional safety precautions shall be provided in the observance of pandemic. Protocols set-forth by the government shall be strictly followed.
- l. Necessary protections to the adjacent property shall be provided to avoid untoward incidents / accidents.
- m. Final cleaning of the work shall be employed prior to the final inspection for certification of final acceptance. Final cleaning shall be applied on each surface or unit of work and shall be of condition expected for a building cleaning and maintenance program.

II. ARCHITECTURAL WORKS

A. ACCENT WALL

- 1. Stainless steel 25mm thk. City Logo
- 2. Stainless steel 25mm thk. Health Department Logo
- 3. Wall finish is made from 12mm thk. Plywood Laminated Finish

B. TRIAGE COUNTER

- 1. Sticker signage must be made from 4mm thk. Acrylic Board
- 2. Partition must be made from 6mm thk. Clear Acrylic Board
- 3. Countertop must be 20mm thk. Granite Slab Tiles on 19mm thk Marine Plywood supported by 50mm x 100mm Good Lumber & 50mm x 50mm Good Lumber.

C. INFORMATION COUNTER

- 1. Sticker signage must be made from 4mm thk. Acrylic Board
- 2. Partition must be made from 6mm thk. Clear Acrylic Board
- 3. Countertop must be 20mm thk. Granite Slab Tiles on 19mm thk Marine Plywood supported by 50mm x 100mm Good Lumber & 50mm x 50mm Good Lumber.

D. OVERHEAD CABINET

- a. Cabinet must be made from 19mm thk Plywood Laminated Finish
- b. 25mm x 50mm Good Lumber must be used for support
- c. 12mm thk Lumber Edging must be used.

E. FILE CABINET

- d. Cabinet must be made from 19mm thk Plywood Laminated Finish
- e. 25mm x 50mm Good Lumber must be used for support
- f. 12mm thk Lumber Edging must be used.

Prepared By:

Checked By:


JONATHAN RAYNALD T. ESPINO
 Planning and Programming Division


JOCELYN A. NAONG
 Planning and Programming Division



TABLE OF CONTENTS

ARCHITECTURAL	
AR-01	PERSPECTIVE, LOCATION MAP, VICINITY MAP
AR-02	GROUND FLOOR PLAN, SECOND FLOOR PLAN
AR-03	TRIAGE, BLOW-UP PLAN, TRIAGE ELEVATION, SECTION, ADJACENT WALL DETAILS, ROOM LABEL, DETAILS, MISCELLANEOUS SERVICES OFFERED

Republic of the Philippines
DEPARTMENT OF PUBLIC WORKS & HIGHWAYS
OFFICE OF THE BUILDING OFFICIAL

DISTRICT / CITY / MUNICIPALITY

21-004 SN

LAND USE & ZONING

LINE & GRADE

ARCHITECTURAL

CIVIL / STRUCTURAL

ELECTRICAL

MECHANICAL

SANITARY

PLUMBING

ELECTRONICS


GEODETIC ENGINEER

GENERAL NOTES

1. VERIFY ACTUAL DIMENSIONS, ASSESS THE STRUCTURE & RECORD ITEMS TO BE REPAIRED AS SPECIFIED IN THE PLANS. UTILITY LINES AND APPURTENANCES, VERIFY EXACT LOCATION AND INVENTS TO ALL EXISTING UTILITY LINES BEFORE CONSTRUCTION. NO TAPPING IS ALLOWED WITHOUT PERMITS FROM AUTHORITIES CONCERNED.
2. THE CONTRACTOR SHALL VERIFY ALL DIMENSIONS BEFORE STARTING WORK AND THE ARCHITECT SHALL BE NOTIFIED IMMEDIATELY OF ERRORS AND/OR OMISSIONS.
3. DESIGN BASED ON LATEST REVISED BUILDING ORDINANCE, DEPARTMENT OF PUBLIC WORKS AND HIGHWAYS.
4. THE PLANS AND SPECIFICATIONS ARE COORDINATED AND WHATEVER CONFLICTS THAT MAY ARISE BETWEEN THE PLANS AND SPECIFICATIONS SHALL BE REFERRED TO THE ARCHITECT FOR INTERPRETATION AND CLARIFICATION.
5. PRECAUTIONARY MEASURES SHOULD BE TAKEN BY THE BUILDER TO PROTECT AND SAVE FROM ANY DAMAGE OF EXISTING UTILITY LINES.
6. THE PLANS ARE INTENDED TO PROVIDE FOR A PLUMB AND LEVEL STRUCTURE. ANY NOTATIONS AND/OR DIMENSIONS INDICATED THAT ARE CONTRARY TO THESE SHALL BE REFERRED TO THE ARCHITECT FOR CLARIFICATION.
7. FINISHED DIMENSIONS SHALL GOVERN OVER SCALED DIMENSIONS.
8. THE CONTRACTOR SHALL CHECK AND VERIFY INSTALLATION AND MOUNTING HEIGHTS OF TOILET FIXTURES AND ACCESSORIES TO THE MANUFACTURER'S TECHNICAL MANUAL.
9. MOUNTING HEIGHT OF FIXTURES AND ACCESSORIES INTENDED FOR DISABLED AND/OR CHILDREN SHALL CONFORM TO THE USE LEVEL TYPE FAUCETS FOR ALL FIXTURES FOR THE USE OF PHYSICALLY HANDICAPPED.
10. ANY DISCREPANCY ON THE DIMENSIONS AND SPECIFICATIONS ON THE DRAWINGS SHALL BE ADDRESSED TO THE ARCHITECT.

1 PERSPECTIVE

NOT TO SCALE

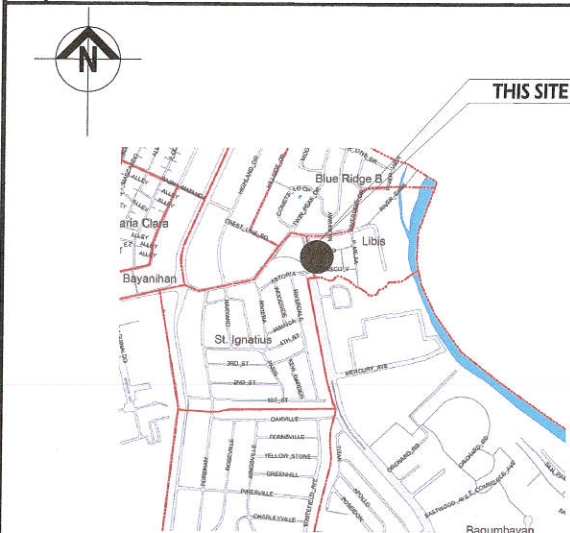

2 LOCATION MAP

NOT TO SCALE

3 VICINITY MAP

NOT TO SCALE



Republic of the Philippines
Lungsod ng Quezon
CITY ARCHITECT DEPARTMENT
5F CIVIC CENTER, 4800 DASH, QUEZON CITY HALL COMPOUND,
ELIPOTI ROAD, OLIVAN, QUEZON CITY



PROVISO:
THESE PLANS AND SPECIFICATIONS HAVE BEEN REVIEWED AND APPROVED BY THE CITY ARCHITECT DEPARTMENT AND THE CITY ENGINEER. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE ACCURACY OF THE INFORMATION PROVIDED AND FOR THE COMPLETION OF THE WORK IN ACCORDANCE WITH THE SPECIFICATIONS AND THE CITY ENGINEER'S APPROVAL.

RECOMMENDING APPROVAL:

Ar. LUCILLE H. CHUA, *uap*, piep
CITY ARCHITECT

Engr. ISAGANI VERZOSA Jr.
CITY ENGINEER

APPROVED BY:

HON. MA. JOSEFINA G. BELMONTE
MAYOR

PROJECT TITLE:

PROPOSED REHABILITATION OF
RECEPTION AREA AT HEALTH CENTERS
IN BARANGAY LIBIS AND BARANGAY
BAGUMBAY (DISTRICT 3)

LOCATION: BRGY. LIBIS AND BRGY. BAGUMBAY, DISTRICT 3, QUEZON CITY

SHEET CONTENTS:

TRIAGE AND ADJACENT WALL PERSPECTIVE
LOCATION MAP
VICINITY MAP

PROJECT NO.:


DATE: March 4, 2021
DRAWN BY: MSBF
DESIGNED BY: Ar. M.B. Ventura
CHECKED BY: Ar. R.G. Resurreccion

SHEET NO.:

AR-01

21-004 N


LEGEND	DESCRIPTION
	EXISTING WALL TO BE RETAINED
	PROPOSED NEW DRY WALL

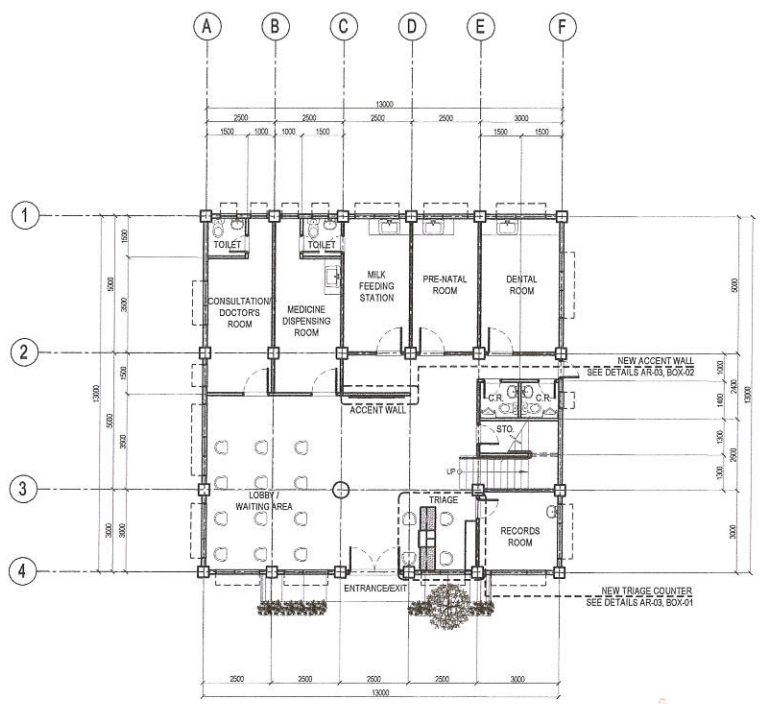

NOTES:
 1. VERIFY ALL ACTUAL DIMENSIONS ON SITE
 2. ALL DISCREPANCIES MUST BE REPORTED TO THE ARCHITECT
 3. REPLACE ALL DOOR LOCKSETS WITH LEVER TYPE DOOR HANDLE

1 GROUND FLOOR PLAN

SCALE 1:100 METERS (20 x 30)
 SCALE 1:200 METERS(A3)

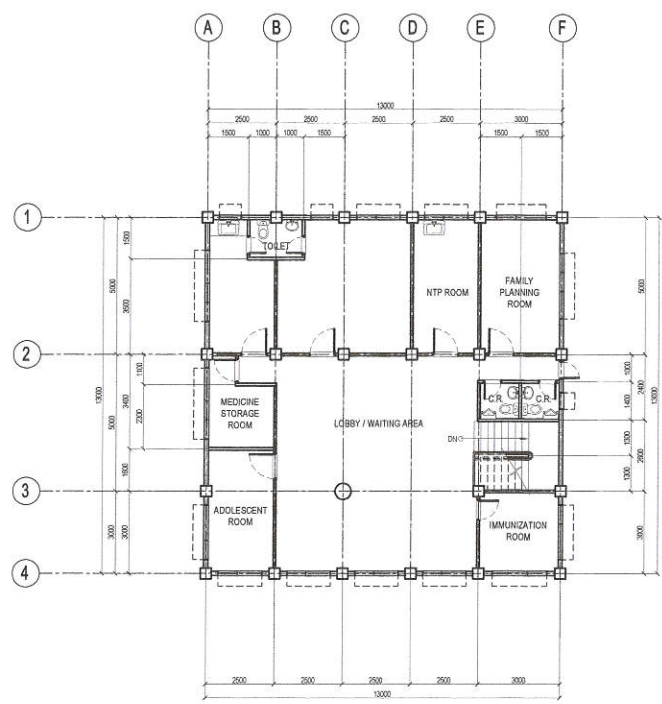


NOTES:
 1. VERIFY ALL ACTUAL DIMENSIONS ON SITE
 2. ALL DISCREPANCIES MUST BE REPORTED TO THE ARCHITECT
 3. REPLACE ALL DOOR LOCKSETS WITH LEVER TYPE DOOR HANDLE

2 SECOND FLOOR PLAN

SCALE 1:100 METERS (20 x 30)
 SCALE 1:200 METERS(A3)

<p>Republic of the Philippines City Architect Department 5th CIVIC CENTER - 0 (Bldg. 3) QUEZON CITY HALL COMPOUND, ELIPTICAL ROAD, QUEZON CITY</p>	PROVIDOR: Ar. LUCILLE H. CHUA, uap, piep CITY ARCHITECT	RECOMMENDING APPROVAL: Engr. SAGAMI S. VERZOSA JR. CIVIL ENGINEER	APPROVED BY: HON. MA. JOSEFA G. BELMONTE MAYOR	PROJECT TITLE: PROPOSED REHABILITATION OF OF RECEPTION AREA AT HEALTH CENTERS IN BARANGAY LIBIS AND BARANGAY BAGUMBAYAN (DISTRICT 3) LOCATION: BRGY. LIBIS AND BRGY. BAGUMBAYAN/DISTRICT 3, QUEZON CITY	SHEET CONTENTS: GROUND FLOOR PLAN SECOND FLOOR PLAN	PROJECT NO.: DATE: March 4, 2021 DRAWN BY: MSBF DESIGNED BY: Ar. M.B. Ventura CHECKED BY: Ar. F.G. Resurreccion	SHEET NO.: AR-02
	Republic of the Philippines City Architect Department 5th CIVIC CENTER - 0 (Bldg. 3) QUEZON CITY HALL COMPOUND, ELIPTICAL ROAD, QUEZON CITY						
	PROVIDOR: Ar. LUCILLE H. CHUA, uap, piep RECOMMENDING APPROVAL: Engr. SAGAMI S. VERZOSA JR. APPROVED BY: HON. MA. JOSEFA G. BELMONTE PROJECT TITLE: PROPOSED REHABILITATION OF OF RECEPTION AREA AT HEALTH CENTERS IN BARANGAY LIBIS AND BARANGAY BAGUMBAYAN (DISTRICT 3) LOCATION: BRGY. LIBIS AND BRGY. BAGUMBAYAN/DISTRICT 3, QUEZON CITY						
	SHEET CONTENTS: GROUND FLOOR PLAN SECOND FLOOR PLAN PROJECT NO.: DATE: March 4, 2021 DRAWN BY: MSBF DESIGNED BY: Ar. M.B. Ventura CHECKED BY: Ar. F.G. Resurreccion SHEET NO.: AR-02						


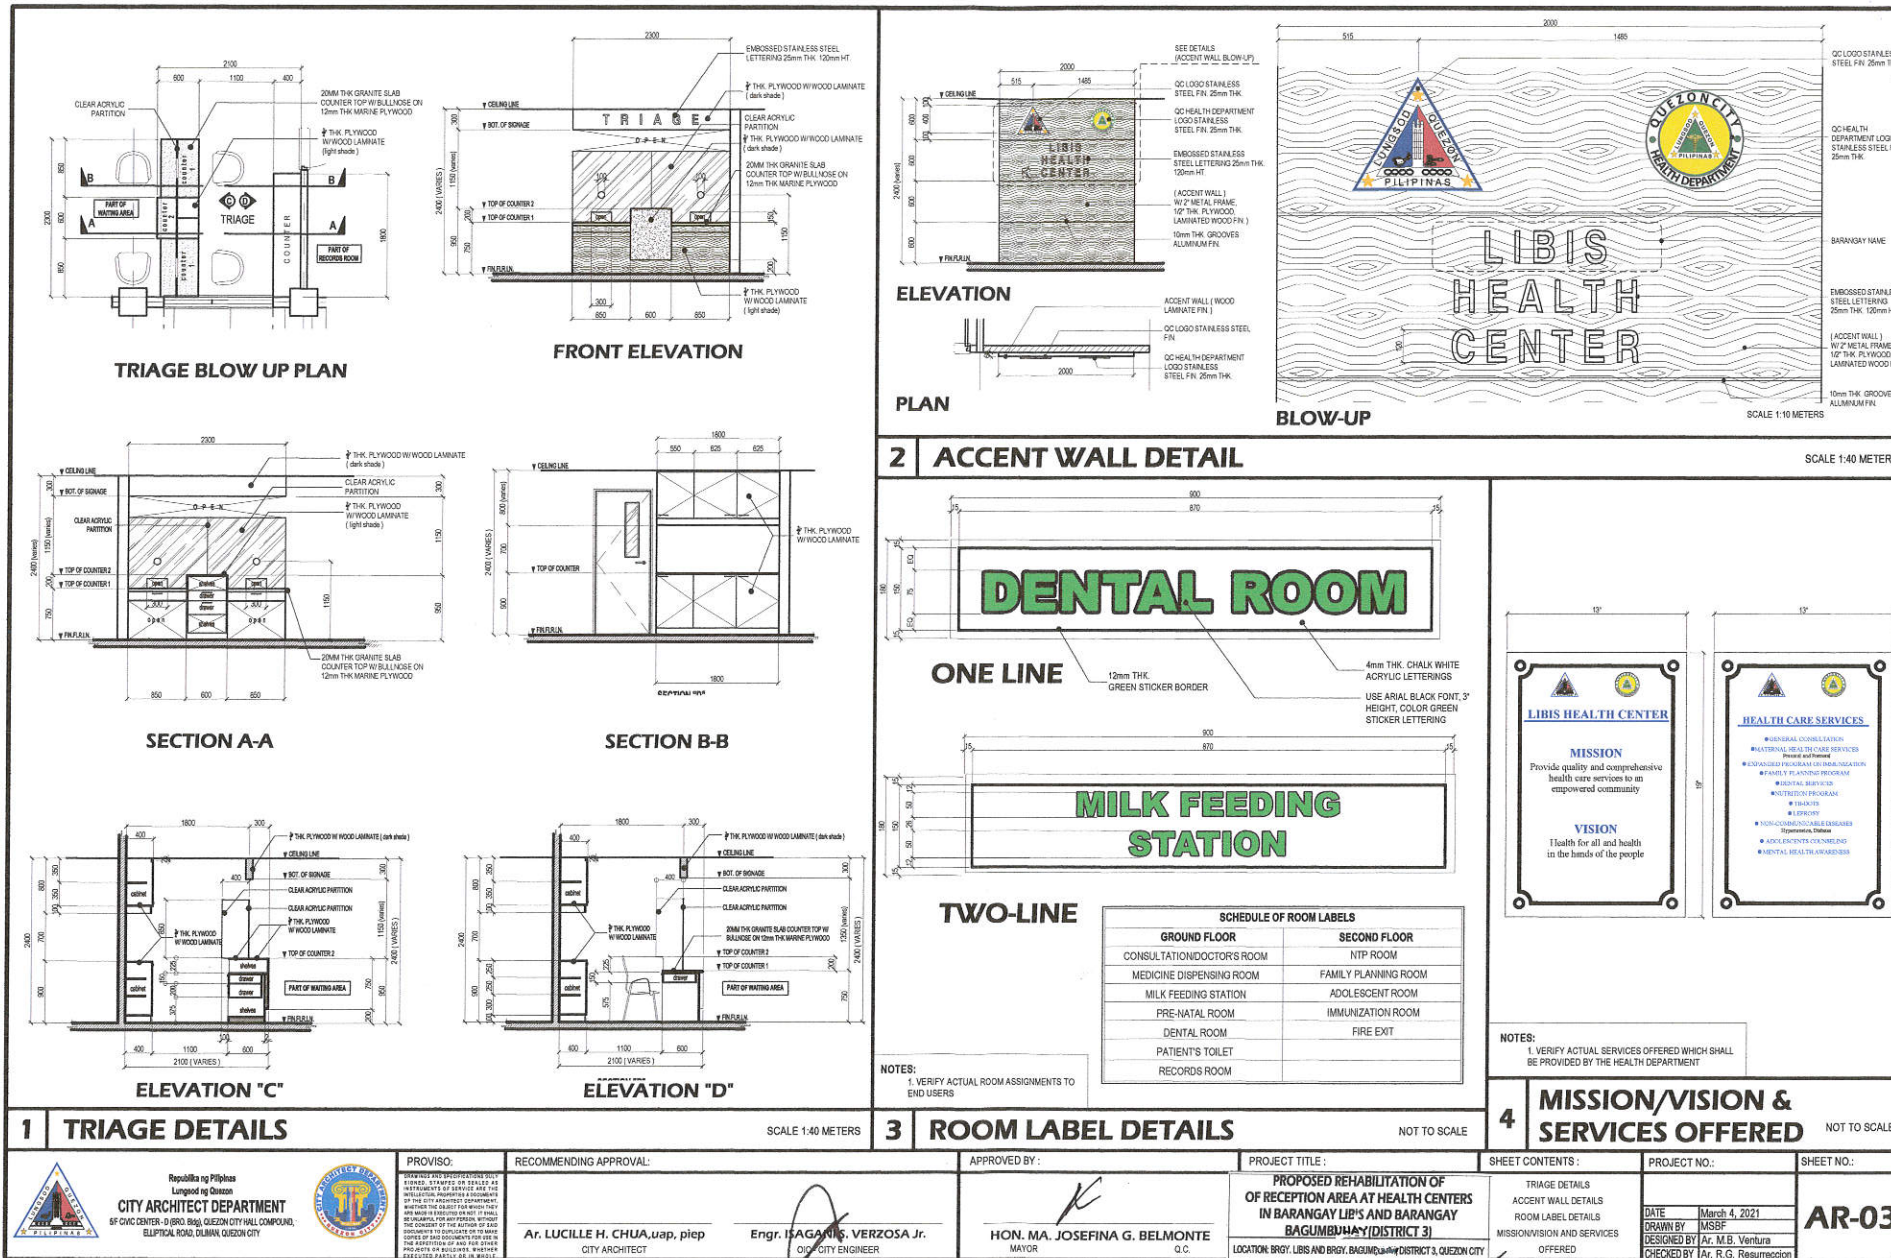


21-004 SV



1 PERSPECTIVE

NOT TO SCALE

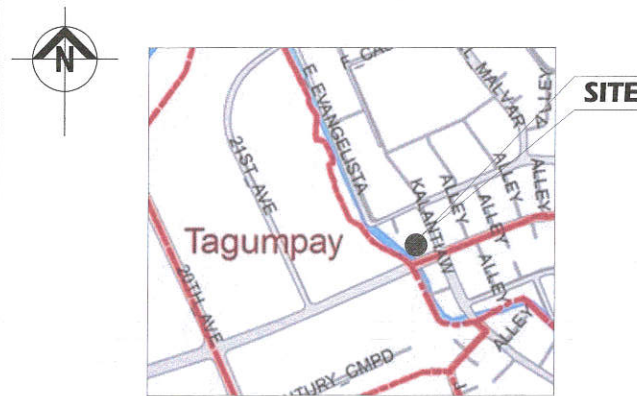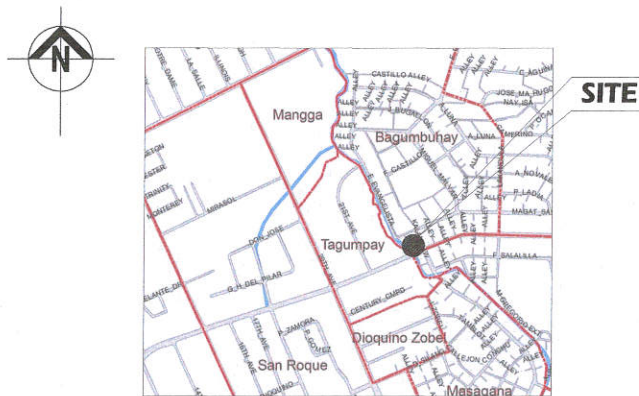

2 VICINITY MAP

NOT TO SCALE

3 VICINITY MAP

NOT TO SCALE



Republika ng Pilipinas
Lungsod ng Quezon
CITY ARCHITECT DEPARTMENT
515 CIVIC CENTER - D (BRO. Bldg), QUEZON CITY HALL COMPOUND,
ELLIPTICAL ROAD, DILIMAN, QUEZON CITY




PROVISO:
DRAWING AND SPECIFICATIONS ONLY
STAINED, STAMPED OR SCALED AS
INSTRUMENTS OF SERVICE ARE THE
INTELLECTUAL PROPERTIES AND DOCUMENTS
OF THE CITY ARCHIST DEPARTMENT.
THEIR SUBJECT OR OBJECT FOR WHICH THEY
AND MADE IS EXCLUDED OR NOT. IT SHALL
BE UNLAWFUL FOR ANY PERSON, WITHOUT
THE CONSENT OF THE AUTHOR OF SAID
DOCUMENTS TO DUPLICATE OR TO MAKE
COPIES OF SAID DOCUMENTS FOR USE IN
THE REPRODUCTION OF AND FOR OTHER
PROJECTS OR BUILDINGS, WHETHER

ARCH. LUCILLE H. CHUA, fuap, piep
CITY ARCHITECT

ENGR. ISAGANI R. VERZOSA, JR.
CITY ENGINEER

APPROVED BY:



HON. MA. JOSEFINA G. BELMONTE
MAYOR

PROJECT TITLE:	PROPOSED REHABILITATION OF OF RECEPTION AREA AT HEALTH CENTERS IN BARANGAY LIBIS AND BARANGAY BAGUMBAY (DISTRICT 3)
LOCATION:	BRGY. LIBIS AND BRGY. BAGUMBAY-DISTRICT 3, QUEZON CITY

SHEET CONTENTS:

PERSPECTIVE
VICINITY MAP
LOCATION MAP

PROJECT NO.:	
DATE	December 2020
DRAWN BY	Ar. J.U.C./A.A.V.
DESIGNED BY	Ar. M.B.V./Ar. J.U.C.
CHECKED BY	Ar. R.G. Resurreccion

SHEET NO.:
AR-01

Republic of the Philippines
DEPARTMENT OF PUBLIC WORKS & HIGHWAYS
OFFICE OF THE BUILDING OFFICIAL

TABLE OF CONTENTS

ARCHITECTURAL

AR-01	PERSPECTIVE, VICINITY MAP, LOCATION MAP, TABLE OF CONTENT
AR-02	EXISTING GROUND FLOOR PLAN, PROPOSED GROUND FLOOR PLAN
AR-03	EXISTING SECOND FLOOR PLAN, PROPOSED SECOND FLOOR PLAN
AR-04	TRIAGE DETAILS, WALL ACCENT DETAILS, MISSION VISION & SERVICES OFFERED

DISTRICT / CITY / MUNICIPALITY

LAND USE & ZONING

LINE & GRADE

ARCHITECTURAL

CIVIL / STRUCTURAL

ELECTRICAL




MECHANICAL

SANITARY



PLUMBING

ELECTRONICS



GEODETIC ENGINEER

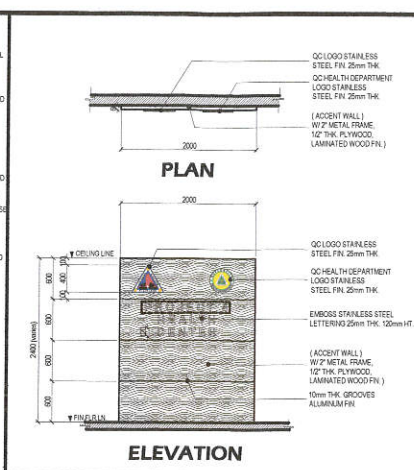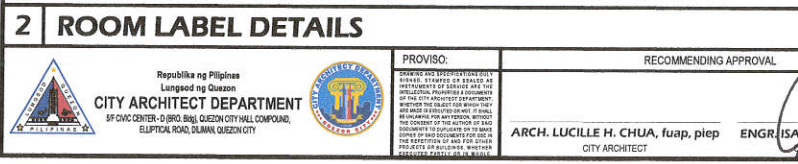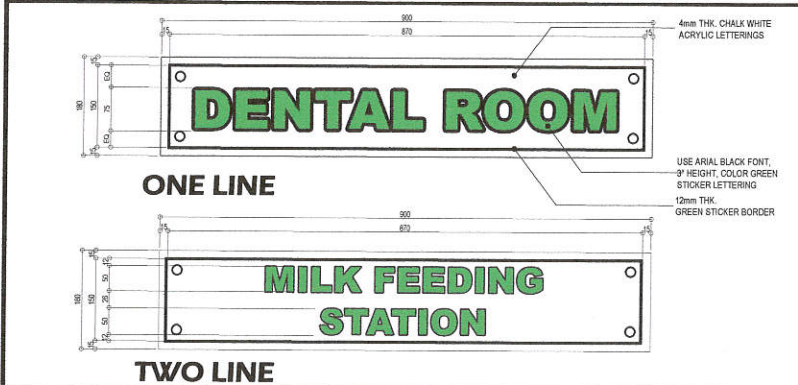

SCHEDULE OF ROOM LABELS	
GROUND FLOOR	SECOND FLOOR
CONSULTATION/DOCTOR'S ROOM	RECORDS ROOM
MEDICINE DISPENSING ROOM	STORAGE ROOM
MILK FEEDING STATION	PRE-NATAL ROOM
NURSES' ROOM	FAMILY PLANNING ROOM
DENTAL ROOM	CONFERENCE ROOM
PATIENT'S TOILET	NTP ROOM
	LABORATORY ROOM
	CASHIER
	PATHOLOGIST ROOM
	RECEIVING/ EXTRACTION ROOM

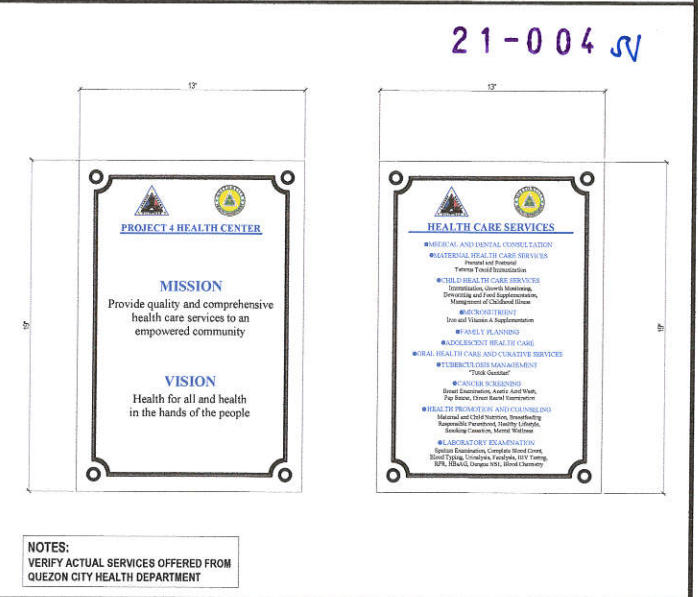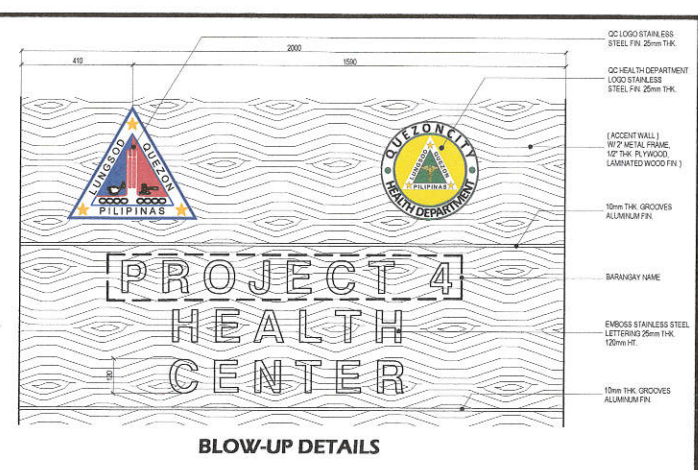

21-004 JV

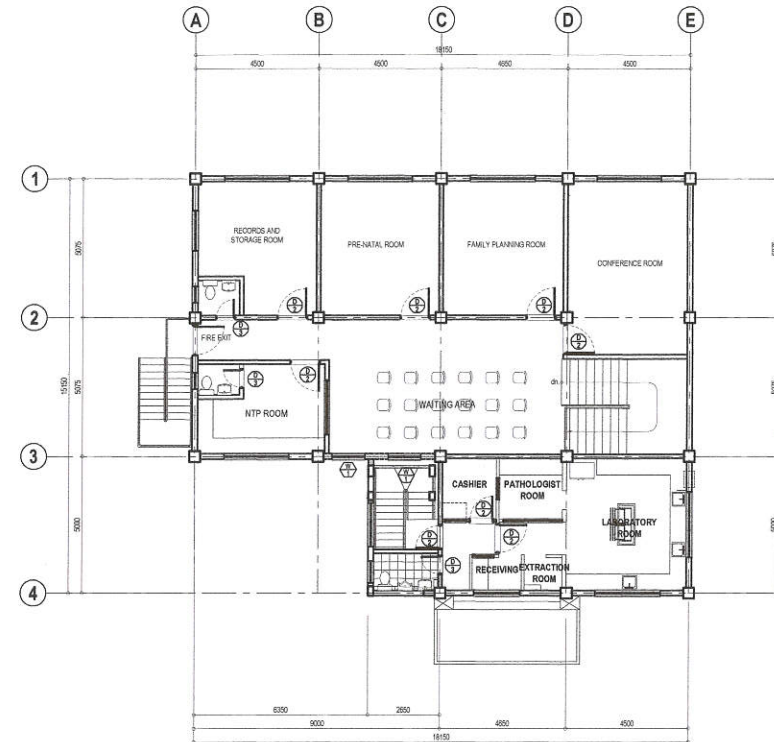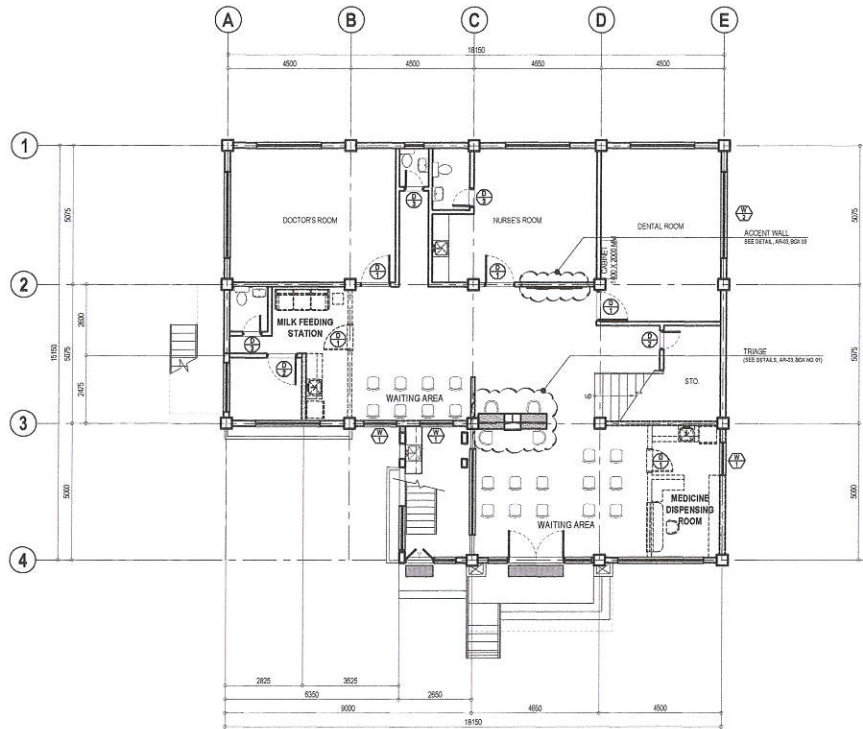


1 GROUND FLOOR PLAN

SCALE 1:100 METERS

2 SECOND FLOOR PLAN

SCALE 1:100 METERS

 <p>Republika ng Pilipinas Lungsod ng Quezon CITY ARCHITECT DEPARTMENT 5F CIVIC CENTER - Q BRD BLDG, QUEZON CITY HALL COMPOUND, ELLIPICAL ROAD, DUMAGU, QUEZON CITY</p>	PROVISO:	RECOMMENDING APPROVAL	APPROVED BY:	PROJECT TITLE:	SHEET CONTENTS:	PROJECT NO.:	SHEET NO.:	
	<p>REPRODUCTION OF THIS PLAN IS PROHIBITED WITHOUT THE WRITTEN PERMISSION OF THE CITY ARCHITECT DEPARTMENT. ANY REPRODUCTION OF THIS PLAN WITHOUT THE WRITTEN PERMISSION OF THE CITY ARCHITECT DEPARTMENT IS A VIOLATION OF THE CITY ENGINEER'S PROFESSIONAL ETHICS AND MAY BE SUBJECT TO PROSECUTION.</p>	<p>ARCH. LUCILLE H. CHUA, fuap, piep CITY ARCHITECT</p>	<p>ENGR. ISAGANI R. VERZOSA, JR. C.E., CITY ENGINEER</p>	<p>HON. MA. JOSEFINA G. BELMONTE MAYOR</p>	<p>PROPOSED REHABILITATION OF OF RECEPTION AREA AT HEALTH CENTERS IN BARANGAY LIBIS AND BARANGAY BAGUMBAY (DISTRICT 3)</p>	<p>GROUND FLOOR PLAN SECOND FLOOR PLAN</p>	<p>DATE: December 2020 DRAWN BY: Ar. J.U.C./A.A.V. DESIGNED BY: Ar. M.B.V./Ar. J.U.C. CHECKED BY: Ar. R.G. Resurreccion</p>	<p>AR-02</p>
	<p>LOCATION: BRGY. LIBIS AND BRGY. BAGUMBAY DISTRICT 3, QUEZON CITY</p>				<p>GROUND FLOOR PLAN SECOND FLOOR PLAN</p>		<p>PROJECT NO.:</p>	